


DURASTEEL®

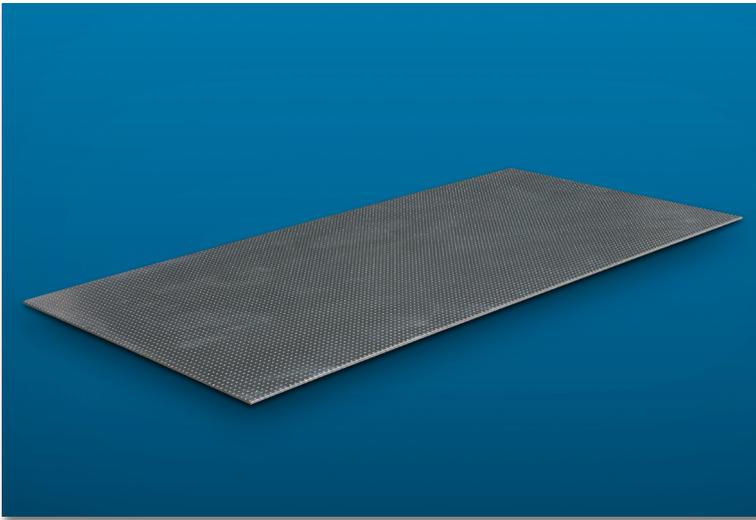

Composite insulation board

DURASTEEL® consists of a calcium silicate core reinforced on both sides with perforated galvanised steel covering sheets.

The punched lugs in the steel sheets are pressed into the core board giving the DURASTEEL® composite board a very high mechanical strength once the drying process is finished.

DURASTEEL® comes in two thicknesses and the material is classified as class A1, non-combustible.

Technical data

Thickness	mm	6	9.5
Building material class	DIN 4102	A1, non-combustible	A1, non-combustible
Classification temperature			
Permanent stress	°C	400	400
Short term up to	°C	1000	1000
Bulk density	kg/m ³	2800	2210
Cold compressive strength	N/mm ²	60	60
Bending strength	N/mm ²	109	84
Tensile strength	N/mm ²	32	30
Modulus of elasticity E	N/mm ²	55000	40000
Thermal conductivity 20 °C	W/m K	0.55	0.55
Sound insulation	dB	28	30
Board weight	kg/m ²	16.8	21
Moisture content (air-dry)	%	6	6
Water absorption	%	14	14

Delivery sizes

Thickness	mm	6	9.5
Length	mm	2500	2500
Width	mm	1200	1200

Other sizes are available on request.

Production tolerances

Thickness	mm	+ 1.5 / - 0	± 1.0
Length and width	mm	± 2.0	± 2.0

DURASTEEL®

Properties & advantages

- High mechanical strength
- Impact and shock proof
- Resistant to water and frost, suited for outdoor use
- Good chemical resistance
- Large-size and thin boards
- Load-bearing
- Non-combustible
- Non-scratch surface

Application areas

HEAVY INDUSTRY

- DURASTEEL® boards are mainly used in the steel and non-ferrous industry as:
 - Heat shield against cyclic or permanent heat radiation
 - Heat shield against metal splashes or sparks
 - Mobile heat shields
 - Office walls close to heat sources
- Flue gas ducts
- Inner wall lining of fire stations

OIL AND GAS


- Heat shields
- Blast and fire walls
- Heavy duty enclosures



Working & processing

To cut and shape DURASTEEL® we recommend the use of a guillotine shear or a water jet. On site it is best to use a compass saw with a fine-toothed blade. Attachment holes should be made using a metal drill on a milling head.

When cutting to size, the maximum workplace concentration values for inhalable dust must be observed. Dust extraction is recommended. See product safety information sheet.

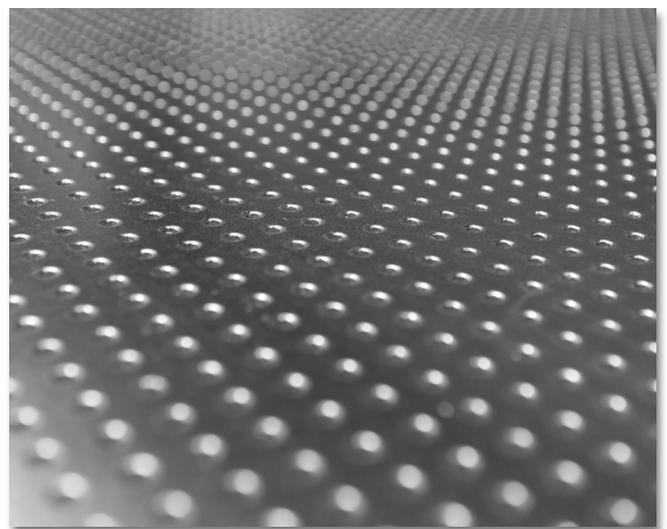

Pieter Zeemanweg 107
3316 GZ Dordrecht

+31 (0)78 617 44 00
reppel@reppel.nl
www.reppel.nl